

Monitor | MD15H

Key Features

- ❑ Durable 15" POS monitor with ultra stable base
- ❑ True Flat Capacitive touch layer or non-touch version
- ❑ HDMI/DP signal optional for better image effect
- ❑ Lower Power Consumption




MODEL	MD15H
Case/Bezel Color	Black
Display Ratio	4:3
Screen Type	15-inch TFT-LCD
Backlight Type	LED
Active Display Area	304.128mm (H) × 228.096mm (V)
Native Resolution	1024*768
Pixel Response Time	8ms
Colors	16.7M
Luminance	350 nits
Contrast Ratio	800:1
Viewing Angle(cr≥10)	Horizontal: 160°(80°/80°); Vertical: 150°(70°/80°)
Input Video Format	RGB Analog
Backlight Lamp Life	50000 (Hours to 1/2 Brightness)
Touch Technology	Projected Capacitive Touch (P-Cap)
Active Touch Area	305.1mm (H) x 229.1mm (V)
Glass Thickness	2.45±0.2mm
Light Transmission	≥85%
Surface Hardness	≥6H
Touch Screen Interface	USB
Glass Type	Tempered
Mounting Options	VESA: 75x75mm
Outline Dimensions	With Base: 348.5*190*290 mm Without Base: 348.5*275*39 mm
Weight	With Base: 3.5kg Without Base: 2kg
Power Supply	External Adapter: 100-240 VAC, 50-60 Hz Input Voltage Range: +12VDC ± 5%
On Screen Display (OSD)	Control(back): Power, Auto, Up, Down, Menu
Power Consumption	≤24W
Speaker	2*3W4R
I/O Ports	1*USB-B
	1* 12 DC-IN
	1*DP
	1*HDMI
Operating Environment	0°C - 40°C/Humidity: 40%-90% RH non-condensing
Storage Environment	-20°C - 60°C; Humidity: 10% to 90% (Non-condensing)
Operating Altitude	≤3000m
EMC & Safety	CE/FCC/ROHS Pending



- 15" screen with bezel free design

- Flexible hinge for better experience

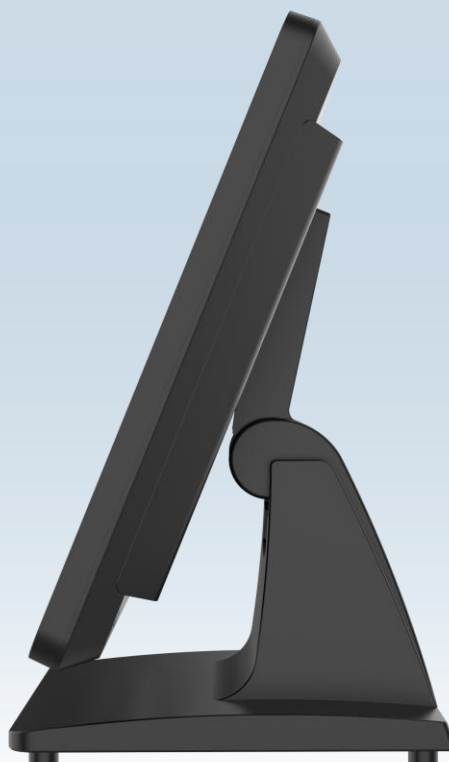

Disclaimer: All products specifications are subject to change without notice.